# HITACHI

**INDOOR UNIT INSTALLATION MANUAL** 

MODEL

**RAK-18QXE RAK-25RXE RAK-35RXE RAK-50RXE** 

Carefully read through the procedures of proper

installation before starting installation work. The sales agent should inform customers regarding the correct operation of installation.

### **Tools Needed For Installation Work**

Mark ● is exclusive use tool for R410A,R32) ⊕ Screwdriver • Measuring Tape • Knife • Saw ø65mm PowerDrill • Hexagonal Wrench Key (챛◯4mm) • Wrench(14,17,19,22mm) Gas leakage Detector • PipeCutter • Putty • Vinyl Tape • Pliers Flare Tool ◉ Vacuum Pump Adapter ◉ Manifold Valve 

### SAFETY PRECAUTION

- Read the safety precautions carefully before operating the unit.
- The contents of this section are vital to ensure safety. Please pay special attention to the following sign. ▲ WARNING ........ Incorrect methods of installation may cause death or serious injury.
  - ▲ CAUTION ....... Improper installation may result in serious consequence.

  - Make sure to connect earth line.
- This sign in the figures indicates prohibition.

Be sure that the unit operates in proper condition after installation. Explain to customer the proper operation and maintenance of the unit as described in the user's guide. Ask a customer to keep this installation manual together with the instruction manual.

### **▲** WARNING


- Please request your sales agent or qualified technician to install your unit. Water leakage, short circuit or fire may occur if you do the installation work yourself.
- Please observe the installation stated in the installation manual during the process of installation. Improper installation may cause water leakage, electric shock and fire.
- Make sure that the units are mounted at locations which are able to provide full support to the weight of the units. If not, the units may
- Observe the rules and regulations of the electrical installation and the methods described in the installation manual when dealing | putty. with the electrical work. Use cables which are approved official in your country. Be sure to use the specified circuit. A short circuit and fire may occur due to the use of low quality wire or improper work.
- Be sure to use the specified cables for connecting the indoor and outdoor units. Please ensure that the connections are tight after the conductors of the wire are inserted into the terminals to prevent the external force is being applied to the connection section of the
- terminal base. Improper insertion and loose contact may cause over-heating and fire. Please use the specified components for installation work. Otherwise, the unit may collapse or water leakage, electric shock, fire or stronger vibration may occur.
- Be sure to use the specified piping set for R410A,R32. Otherwise, this may result in broken copper pipes or faults.
- When installing or transferring an air conditioner to another location, make sure that air other than the specified refrigerant(R410A,R32) does not enter the refrigeration cycle. If other air should enter, the pressure level of the refrigeration cycle may increase abnormally
- Be sure to ventilate fully if a refrigerant gas leak while at work. If the refrigerant gas comes into contact with fire, a poisonous gas may
- After completion of installation work, check to make sure that there is no refrigeration gas leakage. If the refrigerant gas leaks into the room, coming into contact with fire in the fan-driven heater, space heater, etc., a poisonous gas may occur.
- Unauthorized modifications to the air conditioner may be dangerous. If a breakdown occurs please call a qualified air conditioner technician or electrician. Improper repairs may result in water leakage, electric shock and fire, etc.
- Be sure to connect the earth line from the power supply wire to the outdoor unit and between
- the outdoor and indoor unit. Do not connect the earth line to the gas tube, water pipe, lighting rod or the earth line of the telephone unit. Improper earthing may cause electric shocks.
- When finishing the refrigerant collection (pumping down), stop the compressor and then remove the coolant pipe. If you remove the refrigerant pipe while the compressor is operating and the service valve is released, air is sucked and a pressure in the freezing cycle system will build up steeply, causing an explosion or injury.
- When installing the unit, be sure to install the refrigerant pipe before starting the compressor If the refrigerant pipe is not installed and the compressor is operated with the service valve released, air is sucked and the pressure level of the refrigeration cycle may increase abnormally which could result in a rupture and injury.
- The electric cables should neither be reworked nor added.
- Make sure to use an exclusive circuit breaker. Otherwise fire or electric shock might occur by connection failure, isolation failure or over current
- Make sure to connect cables to terminal properly and terminal cover should close firmly. Otherwise, over heating at terminal contact, fire or electric shock might occur.
- Make sure that there is no dust on any connected points of electric cables and fix firmly. Otherwise, fire or electric shock might occur.


## Installation of Hanger, Wall Penetration and Installation of Protection Pipe

## **▲** CAUTION

• The draining of the water container inside the Indoor unit can be done from the left. Therefore the hanger must be fixed horizontally or slightly tilted towards the side of drain hose. Otherwise, condensed water may overflow the water container.

# **Direct Mounting On The Wall**

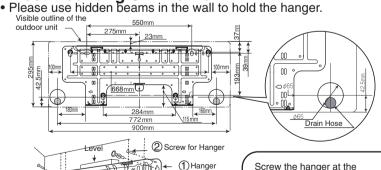




Screw the hanger at the positions possibly near the upper and lower hooks where the indoor unit is hung. Use 4 o more screws to fix the hanger.

### **Procedures of Installation and Precautions**

 Procedures to fix the hanger 1. Drill holes on wall. 2. Push plug into the holes. 3. Fix the hanger on wall (As shown below) (As shown below)




 Procedures to fix the holder of remote control. 1. Drill holes on wall. (As shown below) 2. Push plug into the holes. (As shown below)



### Installation Of Remote Controller


- The remote controller can be placed in its holder which is fixed on wall or beam.
- To operate the remote controller at its holder, please ensure that the unit can receive signal transmitted from the controller at the place where the holder is to be fixed. The unit will beep when signal is received from the remote controller. The signal transmission is weaken by the fluorescent light. Therefore, during the installation of the remote control holder, please switch on the light, even during day time, to determine the mounting location

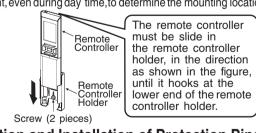

Protection

#### Wall Penetration and Installation of Protection Pipe • Drill a ø65mm hole on wall which is Indoor

slightly tilted towards the outdoor side. Drill the wall at a small angle.



putty to avoid dripping of rain water into the room. • Please ensure smooth flow of water

when installing the drain hose. Improper installing may wet your funiture. • An IEC approved power cord should be

used. Power cord type: NYM.

# **A** WARNING

Be sure that the wire is not in contact with any metal in the wall. Please use the protection pipe as wire passing through the hollow part of the wall so as to prevent the possibility of damaged by mouse. Unless it seals completely, any air with high numidity flows from outdoor and any dew may drop.

#### **A** CAUTION

- A circuit breaker must be installed in the house distribution box for the direct connected power supply cables to the outdoor unit. In case of other installations a main switch with a contact gap or more than 3mm has to be installed. Without a circuit breaker, the danger of electric shock exists.
- Do not install the unit near a location where there is flammable gas. The outdoor unit may catch fire if flammable gas leaks around it. Please ensure smooth flow of water when installing the drain hose. Improper installing may wet your furniture.
- An IEC approved power cord should be used. Power cord type: NYM.

#### THE CHOICE OF MOUNTING SITE Please note the following matters and obtain permission from customer before installation.)

#### **A** WARNING

The unit should be mounted at stable, non-vibratory location which can provide full support to the unit.


#### **A** CAUTION

No nearby heat source and no obstruction near the air outlet is allowed. The clearance distances from top, right and left are specified in figure below

The location must be convenient for water drainage and pipe connection

- with the Outdoor unit. To avoid interference from noise, please place the unit and its remote
- controller at least 1m from the radio and television. To avoid any error in signal transmission from the remote controller, please put the controller far away from high-frequency machines and high-power wireless systems.
- The installation height should be at least 2300 mm or more from the floor.

# Figure showing the Installation of Indoor Unit.

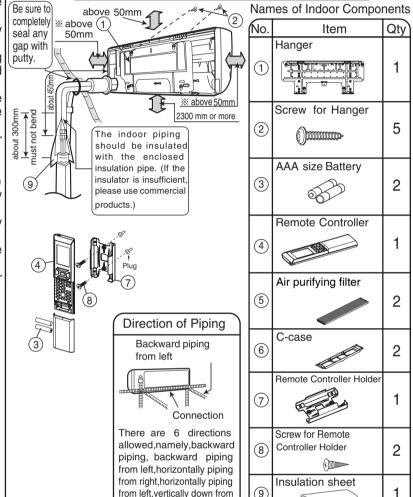

# 2 Installation Of The Indoor Unit

right, vertically down from left.

### **Cutting Low Cover bush**

• While installing the pipe from the right, left or bottom side, use a knife to cut openings as shown in figure. Then smoothen the edges of openings with a file.



### 1 PIPING FROM THE RIGHT SIDE (BACKWARD, DOWNWARD, HORIZONTAL)

Preparation

2-5mm


Sleeve of

 Connect connecting cord. Pull out the pipe, connecting cord and drain hose.




Connecting cords, pipe and drain hose must be laid together with Vinyl tape. Installation

 Insert the pipe through the wall hole. 1) The upper part of the Indoor unit is hanged on the hanger.



Drain Hose Connecting Cord




Projection

- **Changed of Drain Hose and Installation Procedures** • Exchange the location of drain hose and drain cap while installing the pipe from the left side as shown in below. Be sure to plug in the drain hose until the insulating material folds upon itself.

2 PIPING FROM THE LEFT SIDE (BACKWARD, DOWNWARD, HORIZONTAL)

Please use pliers to pull out the drain cap. (This is an easier way to remove the drain



Pipe Rubber strap tied

Connecting

The end of the refrigerating pipes are at

about 15cm

connection


protection pipe

locations marked with " $\nabla$ " symbol.

\$1111111

Insulation pipe (must be wrapped with

with great force

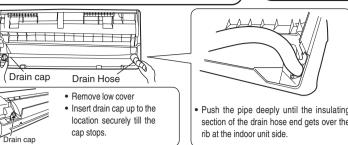

### **▲** CAUTION

- The rubber strap used for fixing the insulator should not be tied with great force. Otherwise, this will damage heat insulation and causes water condensation.
- Please pull the lower part of the Indoor unit outwards to check if the unit is hooked onto the hanger. Improper installation may cause vibration and noise.
- Transform the piping while holding down the lower portion of pipe-support by hand.

### **INSTALLATION AFTER CONNECTION OF REFRIGERATING PIPES**

• The refrigerating pipe should be adjusted to fit into the hole on the wall and then ready for further connection.

• The terminals of 2 connected pipes must be covered

- with insulator used for terminal connection. Then the pipes are wrapped with insulation pipe. Connect the connecting cord after removing low
- (Refer to "CONNECTION OF POWER CORD") After adjustment, fit the connecting cord and pipes into the space available under the unit. Use holder to


hold them tight

• Holder can be attached at the either of 2 places. Please select the easier position.


#### THE CONNECTION OF REFRIGERATING PIPE DURING THE INSTALLATION OF INDOOR UNIT

(Preparation To Install Refrigerating Pipes)

• The refrigerating pipes and connecting cord transform and are attached.



- forwards. Place the drain hose through the hole on the wall. · Wrap the refrigerating pipes with insulation pipe after connecting refrigerating pipe.
- Connect the connecting cord after removing low cover. (Refer to "Connection of Power Cord") • After adjustment, the connecting cord and refrigerating pipes
- are placed into the space available under the Indoor unit. The projection of Indoor unit must hook to the hanger.

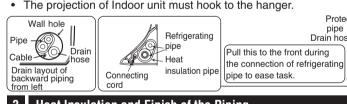

# Heat Insulation and Finish of the Piping

condensation

- The connected terminals should be completed sealed Insulation material for pipe with heat insulator and then tied up with rubber strap. Do not tie the terminals with the tape too tight. If any clearance or over-tightening may cause
- · Please tie the pipe and power line together with vinyl tape as shown in the figure showing the installation of Indoor and Outdoor units.
- To enhance the heat insulation and to prevent water condensation, please cover the outdoor part of the
- drain hose and pipe with insulation pipe. Completely seal any gap with putty.

# Installation of Drain Hose

Bending upwards Condensed water 




You are free to choose the side (left or right) for the installation of drain hose. Please ensure the smooth flow of condensed water of the Indoor unit during installation. (Careless may result in water leakage.)

### **HOW TO REMOVE INDOOR UNIT**

• Push up the [PUSH] sections at the bottom of the indoor unit and pull the bottom plate towards you. Then the claws are released from the stationary plate.

(The [PUSH] sections are indicated by 2 arrows in the right



**A** CAUTION

Be sure that the drain hose is


not loosely connected bend or

proper condition like left figure.

# **INSTALLATION OF REFRIGERATING PIPES AND AIR REMOVAL**


### 1 Preparation of Pipe

Use a pipe cutter to cut the copper pipe and remove burr.



# **A** CAUTION

- Remove burr and jagged edge will cause leakage.
- Point the side to be trimmed downwards during trimming to prevent copper chips from entering the pipe.
- Before flaring, please put on the flare nut.



	0 0 pp 0 1 p 1 p 0	R32.
Outer	A (mm) Rigid Flaring Tool	
Diameter (Ø)	For R410A,R32 tool	For R22 tool
6.35 (1/4")	0 - 0.5	1.0
9.52 (3/8")	0 - 0.5	1.0
12.7 (1/2")	0 - 0.5	1.0

# 2 Pipe Connection

working.

#### · In case of removing flare nut of a indoor unit, first remove a nut of small diameter side, or a seal cap of big diameter side will fly out. Free from water into the piping when

**A** CAUTION


- Be sure to tighten the flare nut to the specified torque with a torque wrench.
- If the flare nut is overtightened, the nut may be split after a long period has passed, and may cause a refrigerant leak.

Please be careful when bending the copper pipe.

Screw in manually while adjusting the center.

After that, use a torque wrench to tighten the






# Torque N·m of pipe (ø) 6.35 (1/4") 13.7 – 18.6 (140 – 9.52 (3/8") 34.3 – 44.1 (350 – 4 Large diameter side | 9.52 (3/6 ) | 12.7 (1/2") | 29.4 - 34.3 (300 - 12.3 - 15.7 (125 - 15


#### Gas leakage inspection

Please use gas leakage detector to check if leakage occurs at connection of Flare nut as shown in below. If gas leakage occurs, further tighten the connection to stop leakage.



# **CONNECTION OF POWER CORD**



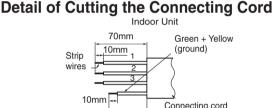


# **A WARNING**

- Leave some space in the connecting cord for maintenance purpose and be sure to secure it with the cord band.
- Secure the connecting cord along the coated part of the wire using the cord band. Do not exert pressure on the wire as this may cause overheating or fire.

# Wiring of The Indoor Unit

• For wire connection of the Indoor unit, you need to remove the front cover, the low cover under the body of the unit and terminal cover.

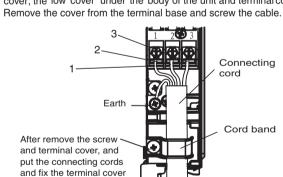

### low to connect the optional parts (WIFI Adapter,H-LINK RAC Adapter, Dry contact, Wired Remote Controller) For cable connection to control P.W.B., you need to remove front cover and electrical box cover. Each connecting location is as below. ① Dry contact: CN6


Method to remove the low cover

Pull at the 1 and 2 in

the directions as shown

by arrows to remove the


- ② WIFI Adapter or H-LINK RAC Adapter: CN7 (3) Wired Remote Controller: CN20
- Please check and confirm manuals attached to each optional parts for more connection details. You can refer to this installation manual how to remove
- and re-attach the front cover. Please be careful not to damage lead wires by edge of




# How to remove the front cover

1 Remove the front panel

with screw.




- After opening the front panel by both hands ① Undo the right arm while pushing it inside.
- 2 Remove the filters.



#### 4 Install the filter

3 Tighten three screws.




How to Attach the Front Cover

the front cover to lock the claws.

### **▲** CAUTION

Remove and attach the front cover to the direction as shown in the figure to ensure no damage occurs to the ECO sensor.




# FINAL STAGE OF INSTALLATION

#### 1 Check that the drain pan is securely attached. 2 After installing the front cover onto the unit, hook three claws at upper side of the cover securely. Then, push the center of



② Slide the front panel to right as shown in figure. Then remove while pulling it to front.

3 After removing three screws, pull the center of the front cover and release the claws. 4 Pull the side faces (lower sections) of the front



5 Slide the shafts of the right and left arms on the front panel along the steps to insert the shafts into the holes till they stop After checking that the shafts are securely inserted, close the

